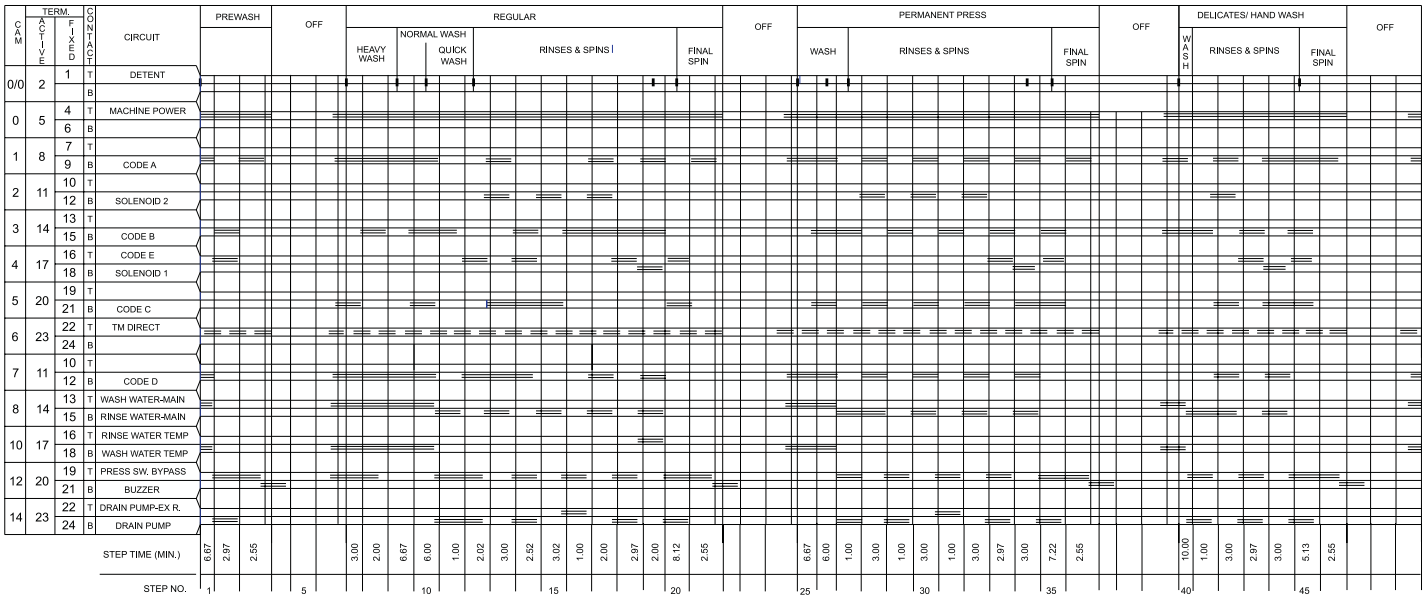

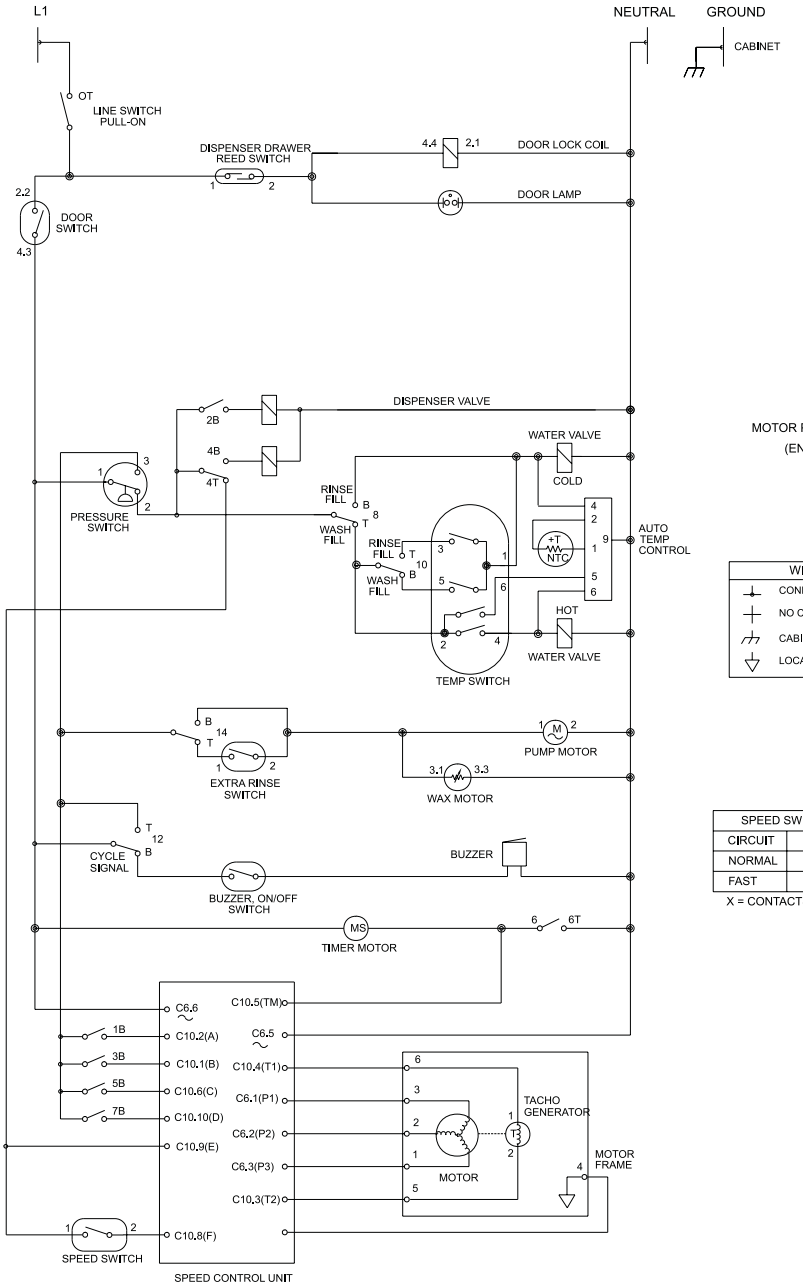

COMPONENT RESISTANCE TABLE		
ELECTRICAL COMPONENT		RESISTANCE Ω @ 77°F (25°C)
WATER VALVE SOLENOIDS		880 ±10%
DOOR LOCK SOLENOID		380 ±10%
TIMER MOTOR		2425 ±6%
PUMP MOTOR		15 ±7%
DISPENSER VALVE SOLENOIDS		1100 ±7%
MOTOR	M1 TO M2	2.6 ±7%
	M2 TO M3	2.6 ±7%
	M1 TO M3	2.6 ±7%
	M5 TO M6	184 ±7%

MOTOR PLUG-MALE
(END VIEW)

TEMPERATURE SWITCH				
	CIRCUIT			
WASH/ RINSE	1-3	1-5	2-6	2-4
H/C W/C *		X		X
C/C * W/W *	X	X		X
REG C/C REG W/C REG W/W	X	X	X X	X X

H=HOT W=WARM C=COLD
REG=REGULATED X=CLOSED
*OPTIONAL (NOT IN ALL MODELS)

WIRING CODES	
	CONNECTION
	NO CONNECTION
	CABINET GROUND
	LOCAL GROUND



NO LOAD, START POSITION
OF PERMANENT PRESS

SPEED SWITCH	
CIRCUIT	1-2
NORMAL	X
FAST	

X = CONTACTS CLOSED



TIMER PLUG-MALE
(END VIEW)

⚠ WARNING TO REDUCE THE RISK OF ELECTRICAL SHOCK DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY BEFORE ATTEMPTING ANY USER MAINTENANCE. TURNING THE CONTROLS TO THE OFF POSITION DOES NOT DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY.

WIRING DIAGRAM
P/N 134053100