


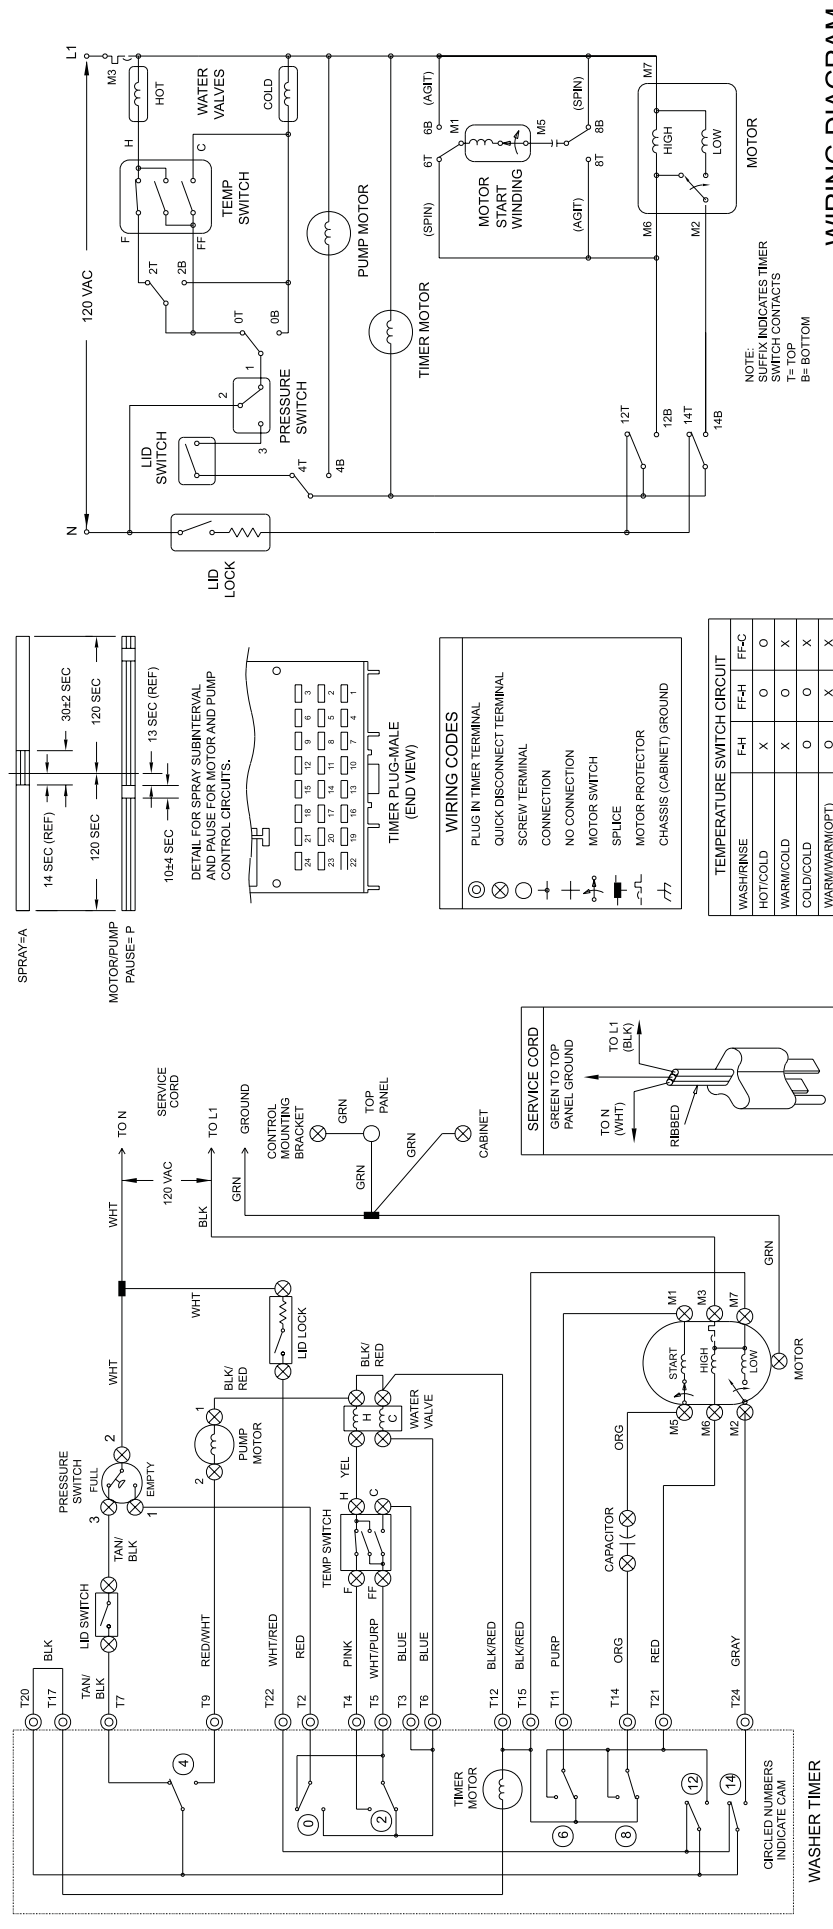


CAUTION: DISCONNECT ELECTRIC CURRENT BEFORE SERVICING

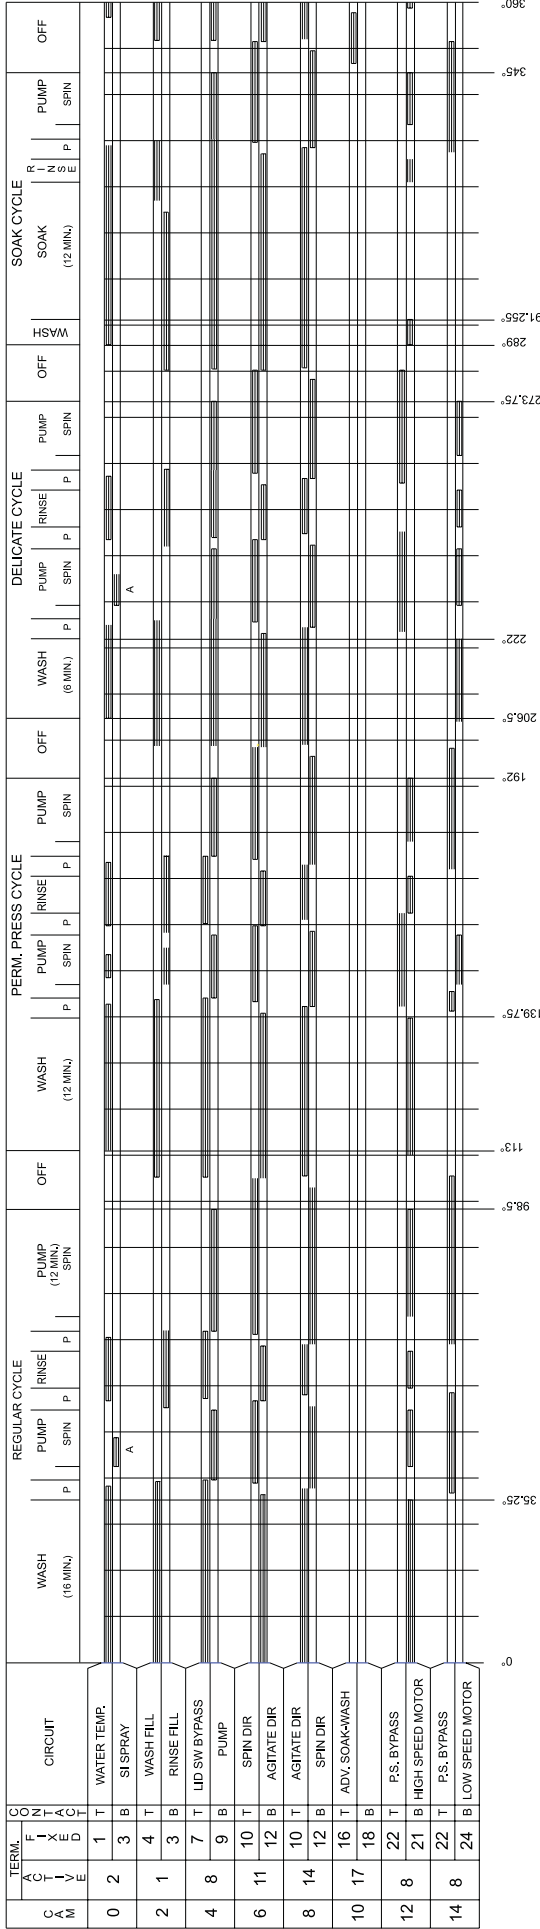


WIRING CODES

- ⊙ PLUG IN TIMER TERMINAL
- ⊗ QUICK DISCONNECT TERMINAL
- SCREW TERMINAL
- CONNECTION
- + NO CONNECTION
- ⊕ MOTOR SWITCH
- ⊞ SPULCE
- ⊞ MOTOR PROTECTOR
- ⊞ CHASSIS (CABINET) GROUND

TEMPERATURE SWITCH CIRCUIT

	F-H	FF-H	FF-C
WASH/RINSE	X	O	O
HOT/COLD	X	O	X
WARM/COLD	O	O	X
COLD/COLD	O	O	X
WARM/WARM(OPT)	O	X	X

O=OPEN X=CLOSED
(OPT)=OPTIONAL ON SOME MODELS



WIRING DIAGRAM
134126200

ORCLED NUMBERS INDICATE CAN