

# KitchenAid® Electric Built-in Cooktop

## PRODUCT MODEL NUMBERS

KECS100GBL  
KECS100GBT  
KECS100GSS  
KECS100GWH  
KECS161GBL  
KECS161GBT  
KECS161GSS  
KECS161GWH


### Electrical:

**240-volt cooktop:** A three-wire or four-wire, single phase, 240-volt, 60-Hz, AC-only electrical supply is required on a separate, 40-ampere circuit, fused on both sides of the line. Use copper wire only. A time-delay fuse or circuit breaker is recommended.

**120-volt cooktop:** 120-volt, 60-Hz, AC-only, 20-amp. electrical supply. Use copper wire only. A time-delay fuse or circuit breaker and separate circuit is recommended.

Grommet is required for electrical cable or power supply cord hole cut in a metal cabinet.

## OVERALL DIMENSIONS

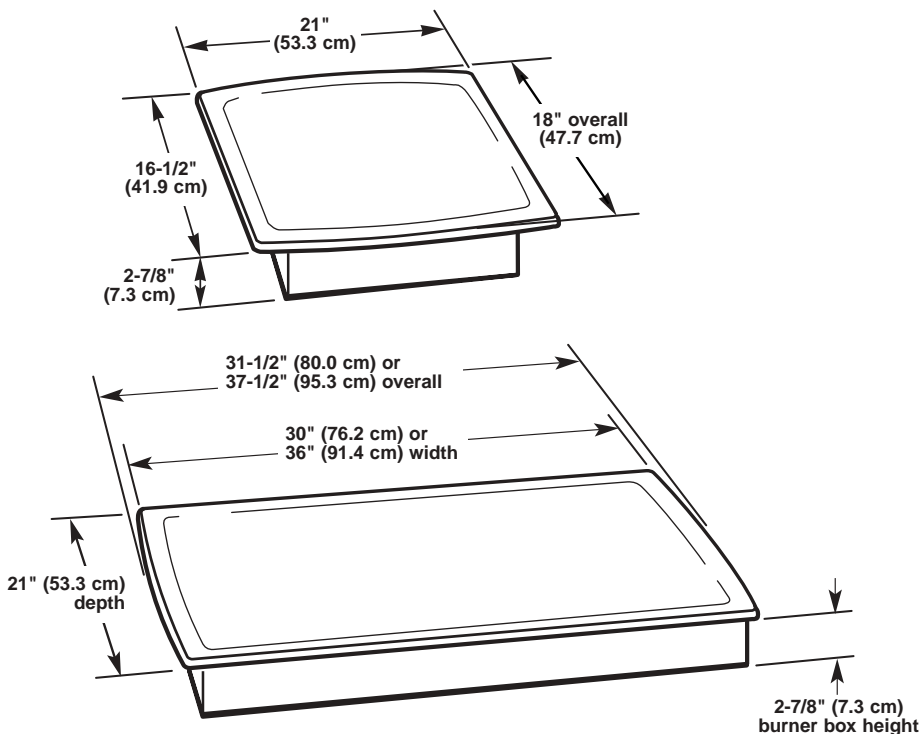

## CABINET OPENING DIMENSIONS


Cooktop width	A	B	C
21" (53.3 cm)	18-5/8" (33.7 cm)	15-1/2" (34.4 cm)	21" (53.3 cm)
30" (76.2 cm)	28-7/8" (73.3 cm)	18-5/8" (47.3 cm)	30" (76.2 cm)
36" (91.4 cm)	35" (89 cm)	18-5/8" (47.3 cm)	36" (91.4 cm)

### Base cabinet:

21" (53.3 cm) cooktop requires a 24" (61 cm) min. base cabinet.

30" (76.2 cm) and 36" (91.4 cm) cooktops require a 30" (76.2 cm) base cabinet.

If cabinet has a drawer, a 4" (10.2 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required.

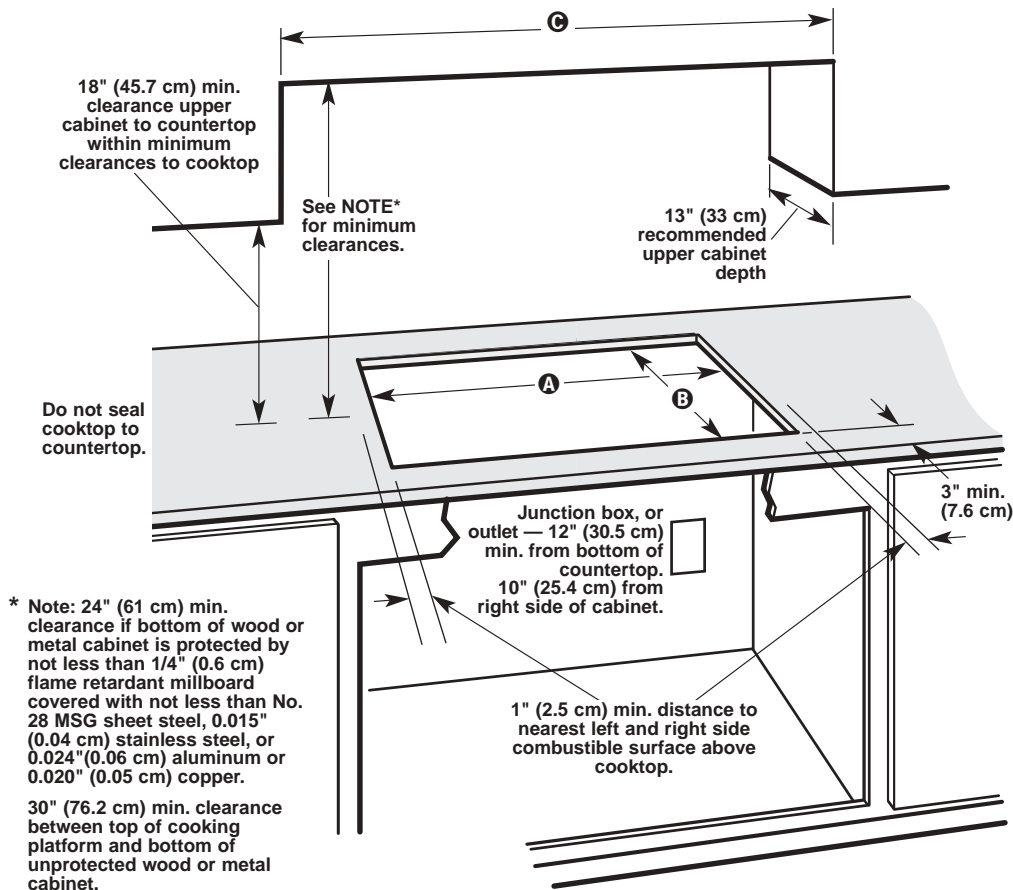

\* Note: 24" (61 cm) min. clearance if bottom of wood or metal cabinet is protected by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.04 cm) stainless steel, or 0.024" (0.06 cm) aluminum or 0.020" (0.05 cm) copper.

30" (76.2 cm) min. clearance between top of cooking platform and bottom of unprotected wood or metal cabinet.