

# KitchenAid® 36" Pro Line™ Commercial Style Cooktop

## PRODUCT MODEL NUMBERS

KGCV465M


**Gas supply:** Cooktop is equipped for use with NATURAL gas. Cooktop can be converted to L.P. gas. Gas supply line of 3/4" rigid pipe to cooktop location. If local codes permit, a new AGA or CSA design-certified, 4-5 foot (1.2-1.5 m) long, 1/2" or 3/4" I.D., flexible metal appliance connector is recommended for connecting cooktop to gas supply line. Pressure regulator has 3/8" female pipe threads. The supply line shall be equipped with an approved shutoff valve.

**Electrical:** 120-volt, 60-Hz, AC-only, 15-amp. electrical supply. Use copper wire only. A time-delay fuse or circuit breaker and separate circuit is recommended.

It is recommended that an overhead vent hood be used with this cooktop. For island installations, a 48" (122 cm) hood is recommended.


Cooktop location should be away from strong draft areas, such as windows, doors and strong heating vents or fans.

## OVERALL DIMENSIONS

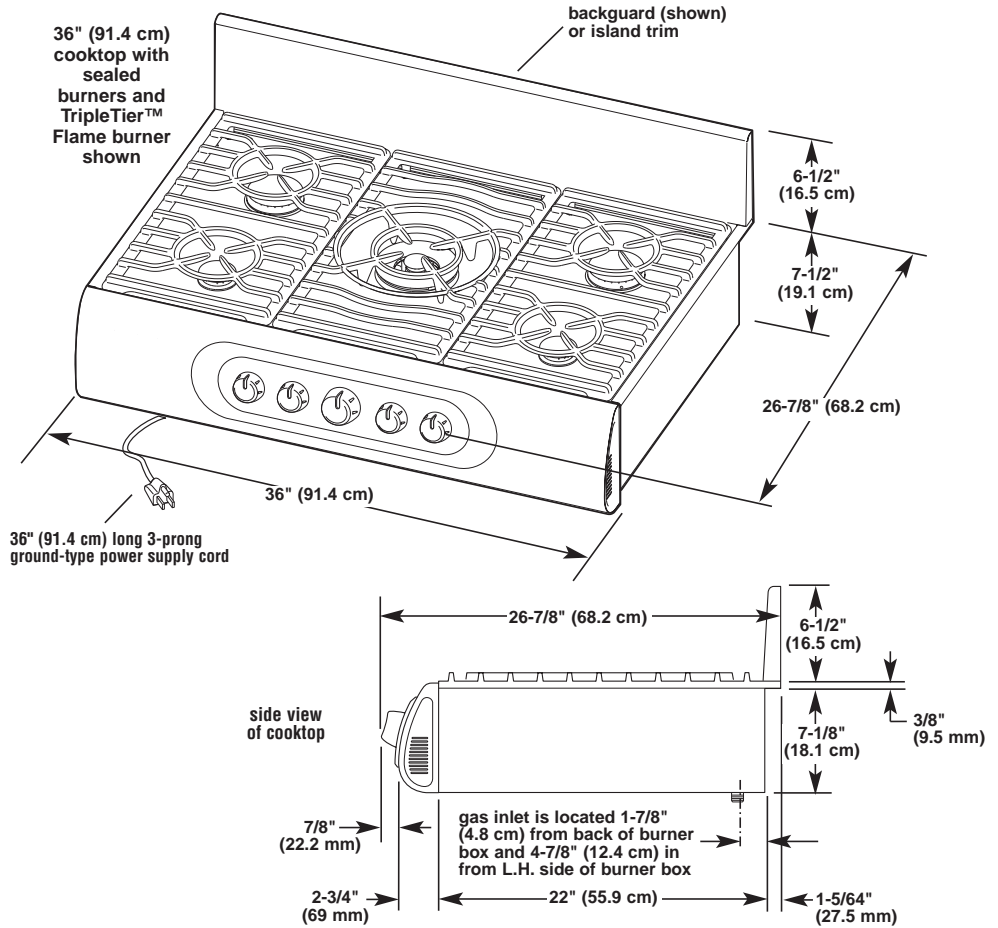


## CABINET OPENING DIMENSIONS

3-prong ground-type outlet should be located on left hand side of cutout 8" (20.3 cm) max. from enclosure sidewall.

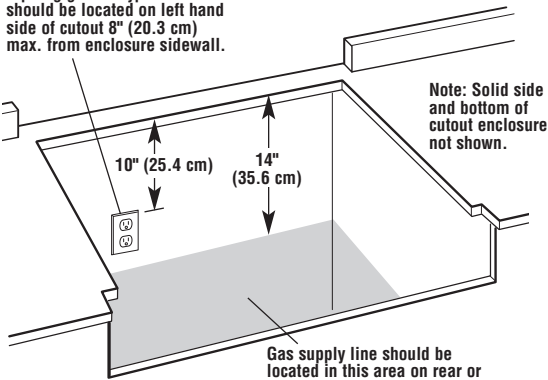

### Gas and Electric Connection Locations

### CORNER NOTCH DETAIL



A		B (min.)*		C	D	E
island trim	backguard	island trim	backguard	backguard opening	cabinet and countertop	countertop only
5" (12.7 cm)	1-3/4" (4.4 cm)	48" (121.9 cm)		36" (91.4 cm)	35-1/4" (89.5 cm)	36" (91.4 cm) or 35-7/8" (91.1 cm) for zero clearance fit

Dimensions are to a combustible surface.

\*Note: Dimension "B" can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is protected by not less than 0.25" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

