

KitchenAid® Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS


KBLA20ER KBRA22ER
 KBLA22ER KBRA22KR
 KBLA22KR KBRP20ER
 KBRA20ER

Electrical: A 115 Volt, 60 Hz., AC only 15 or 20 ampere fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 35 and 100 psi (241- 689 kPa) is required to operate the water dispenser and ice maker.


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 - 414 kPa).

OVERALL DIMENSIONS

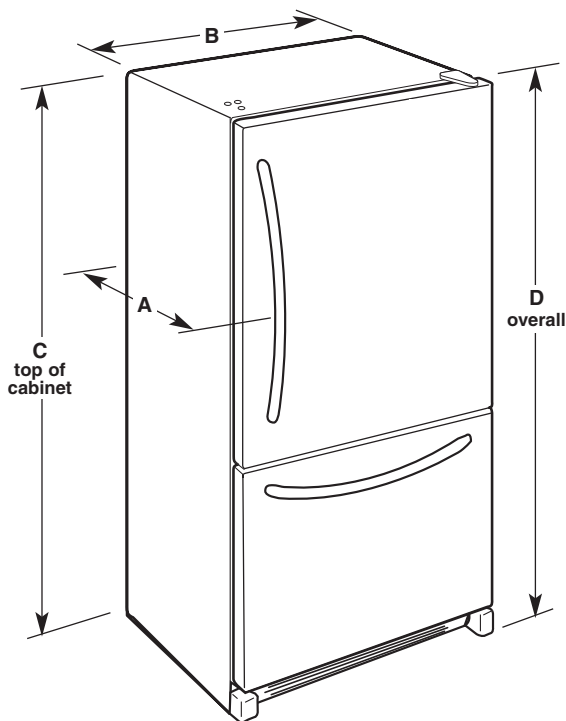

Model	Depth "A"	Width "B"	Cab. Height "C"	Overall Height "D"
KBLA20ER	28 1/2"	35 5/8"	68 5/8"	69 7/8"
KBLA22ER	32 1/2"	32 5/8"	68 5/8"	69 7/8"
KBLA22KR	32 1/2"	32 5/8"	68 5/8"	69 7/8"
KBRA20ER	28 1/2"	35 5/8"	68 5/8"	69 7/8"
KBRA22ER	32 1/2"	32 5/8"	68 5/8"	69 7/8"
KBRA22KR	32 1/2"	32 5/8"	68 5/8"	69 7/8"
KBRP20ER	28 1/2"	35 5/8"	68 5/8"	69 7/8"

LOCATION REQUIREMENTS

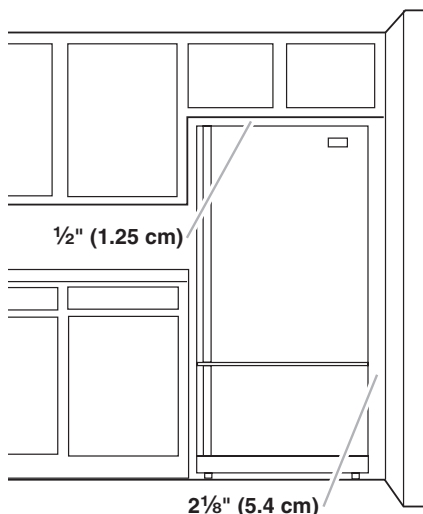

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space at the top and behind the refrigerator. When installing your refrigerator next to a fixed wall, leave 2 1/8" (5.4 cm) minimum on each side (depending on your model) to allow for the door to swing open. If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

NOTE: It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source. Do not install the refrigerator in a location where the temperature will fall below 55°F (13°C).