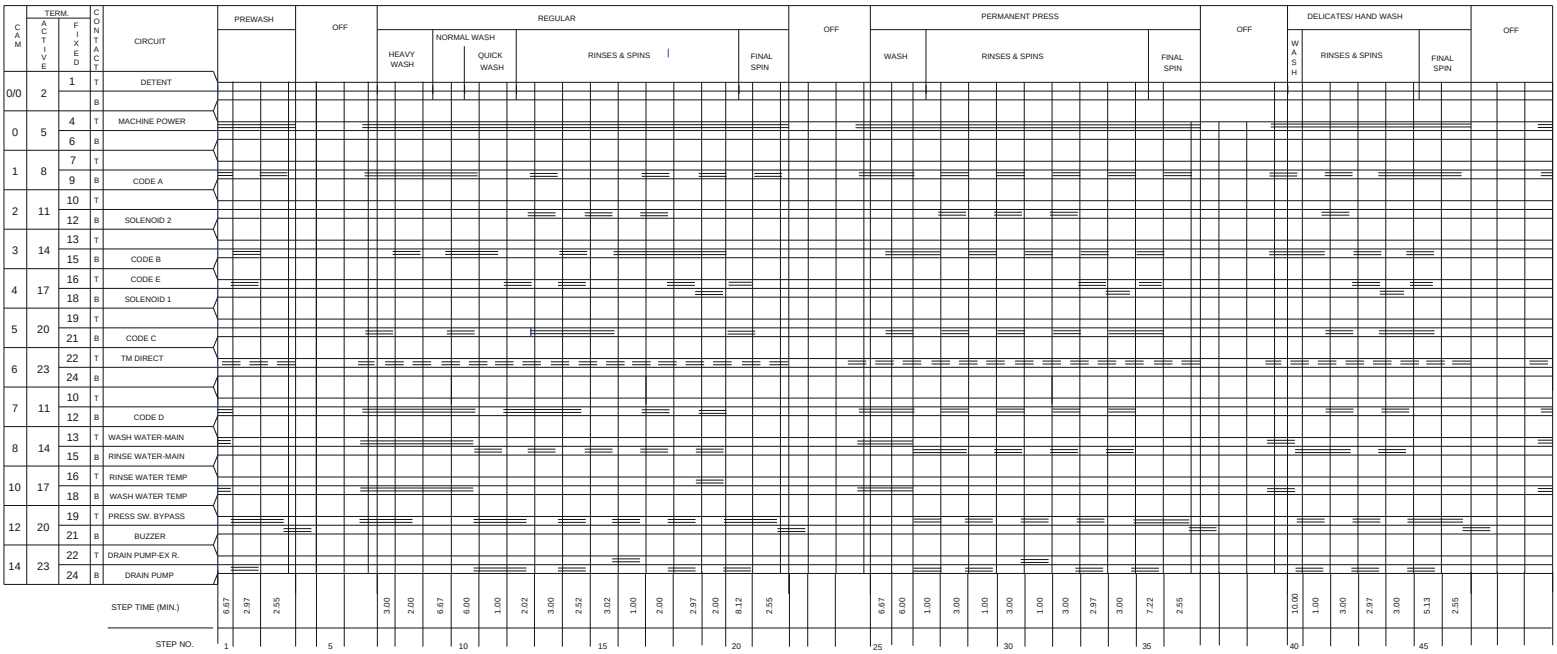

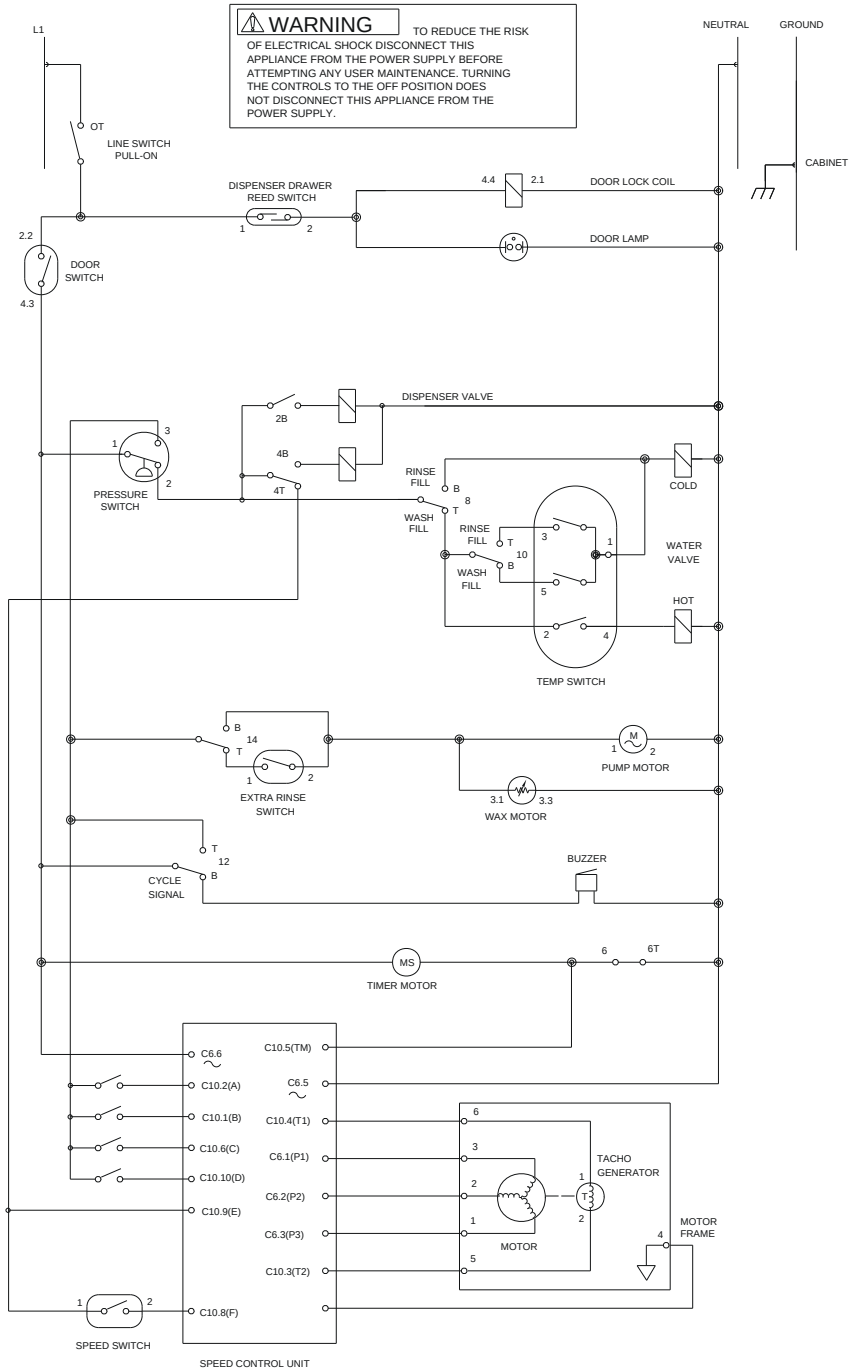

COMPONENT RESISTANCE TABLE		
ELECTRICAL COMPONENT		RESISTANCE Ω @ 77°F(25 @ 77°C)
WATER VALVE SOLENOIDS		880 ±10%
DOOR LOCK SOLENOID		380 ±10%
TIMER MOTOR		2425 ±6%
PUMP MOTOR		15 ±7%
DISPENSER VALVE SOLENOIDS		1100 ±7%
MOTOR	M1 TO M2	2.6 ±7%
	M2 TO M3	2.6 ±7%
	M1 TO M3	2.6 ±7%
	M5 TO M6	184 ±7%

WIRING CODES

- CONNECTION
- NO CONNECTION
- CABINET GROUND
- LOCAL GROUND



NO LOAD, START POSITION OF PERMANENT PRESS



MOTOR PLUG-MALE (END VIEW)

TEMPERATURE SWITCH CIRCUIT			
WASH/ RINSE	1-3	1-5	2-4
C/C		X	
W/C		X	X
W/W	X	X	X
H/C			X

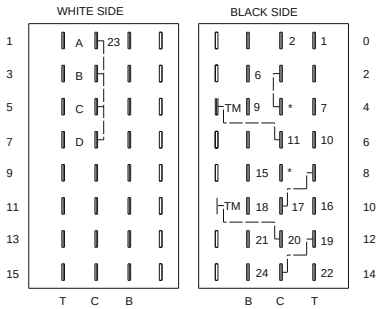

TIMER PLUG-MALE (END VIEW)

WIRING DIAGRAM
P/N 131854700 A