

KitchenAid® Refrigerator

PRODUCT MODEL NUMBERS


KTLa19KR	KTRC22EM
KTLa22EM	KTRP19KR
KTLa22KR	KTRP22EM
KTRA19EM	KTRP22KR
KTRA19KR	
KTRA22EM	
KTRA22KR	

Electrical: A 115 Volt, 60 Hz., AC only 15 or 20 ampere fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 and 120 psi (207 - 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed,


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 - 414 kPa).

OVERALL DIMENSIONS

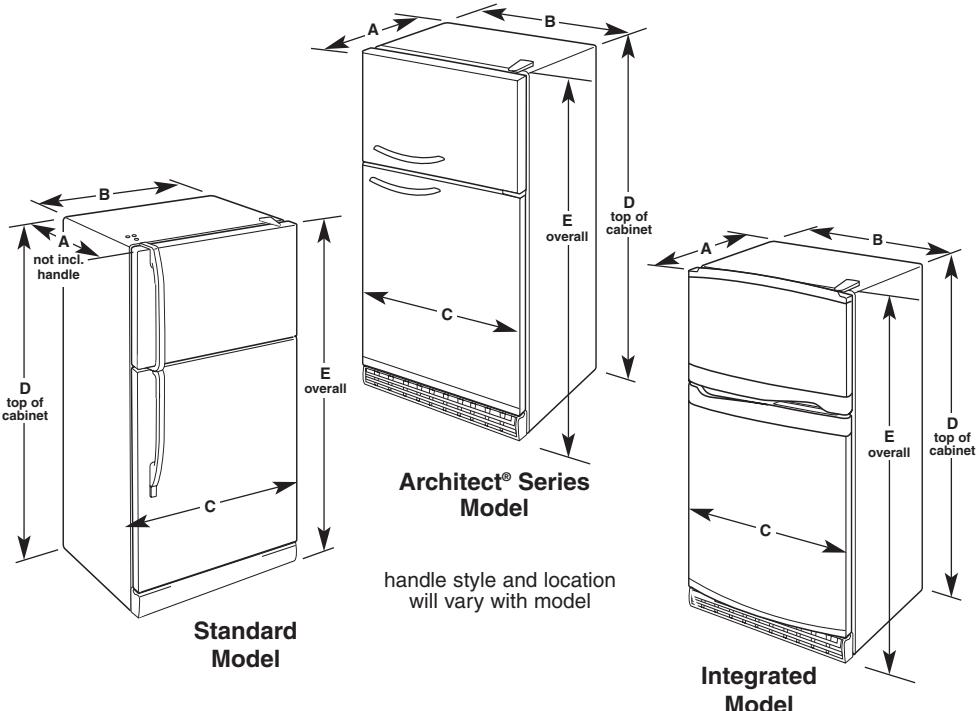

Model size	Depth "A"	Cab. Width "B"	Door Width "C"	Cab. Height "D"	Overall Height "E"
STANDARD MODELS					
19 cu.ft.	30 3/4"	29 1/2"	29 3/4"	65 1/2"	66 1/4"
22 cu.ft.	30 3/4"	32 1/2"	32 3/4"	65 1/2"	66 1/4"
INTEGRATED MODELS					
22 cu.ft.	31 1/2"	32 1/2"	33 1/8"	65 1/2"	66 1/2"
ARCHITECT® SERIES MODELS					
19 cu.ft.	32 7/8"	29 1/2"	29 3/4"	65 1/2"	66 1/4"
22 cu.ft.	32 7/8"	32 1/2"	32 3/4"	65 1/2"	66 1/4"

LOCATION REQUIREMENTS

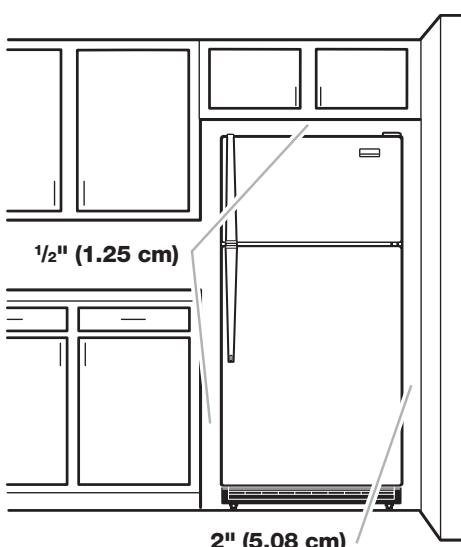

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. When installing your refrigerator next to a fixed wall, leave 2" (5.08 cm) minimum on the hinge side (some models require more) to allow for the door to swing open. If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

NOTE: It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source. Do not install the refrigerator in a location where the temperature will fall below 55°F (13°C).