


CAUTION: DISCONNECT ELECTRIC CURRENT BEFORE SERVICING. LABEL ALL WIRES PRIOR TO DISCONNECTION WHEN SERVICING CONTROLS. WIRING ERRORS CAN CAUSE IMPROPER AND DANGEROUS OPERATION. VERIFY PROPER OPERATION AFTER SERVICING.

TERM. NO.	CIRCUIT	REGULAR CYCLE								PERM. PRESS CYCLE								DELICATE CYCLE								SOAK CYCLE							
		WASH (16 MIN.)	P	SPIN	R	RINSE	P	SPIN	OFF	WASH (12 MIN.)	P	SPIN	R	RINSE	P	SPIN	OFF	WASH (6 MIN.)	P	SPIN	R	RINSE	P	SPIN	OFF	WASH (12 MIN.)	R	P	SPIN	OFF			
1	T	WATER TEMP.																															
2	B	SI SPRAY																															
3	T	WASH FILL																															
4	B	RINSE FILL																															
7	T	LID SW BYPASS																															
8	B	PUMP																															
9	T	SPIN DIR																															
10	B	AGITATE DIR																															
11	T	AGITATE DIR																															
12	B	SPIN DIR																															
14	T	ADV. SOAK-WASH																															
16	B	P.S. BYPASS																															
17	T	HIGH SPEED MOTOR																															
18	B	P.S. BYPASS																															
22	T	LOW SPEED MOTOR																															
21	B	P.S. BYPASS																															
22	T	LOW SPEED MOTOR																															
24	B	P.S. BYPASS																															

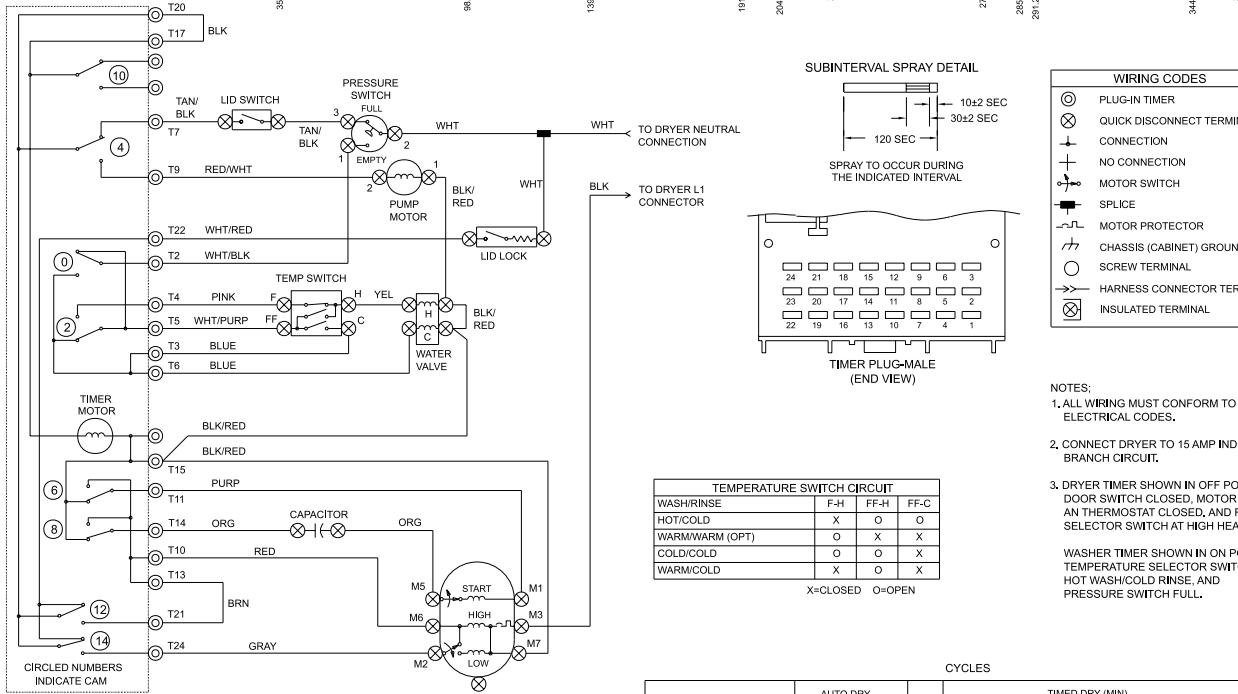

WIRING CODES

- ⊙ PLUG-IN TIMER
- ⊗ QUICK DISCONNECT TERMINAL
- CONNECTION
- NO CONNECTION
- ⊕ MOTOR SWITCH
- SPLICE
- MOTOR PROTECTOR
- CHASSIS (CABINET) GROUND
- SCREW TERMINAL
- HARNESS CONNECTOR TERMINAL
- ⊗ INSULATED TERMINAL

NOTES:


- ALL WIRING MUST CONFORM TO LOCAL ELECTRICAL CODES.
- CONNECT DRYER TO 15 AMP INDIVIDUAL BRANCH CIRCUIT.
- DRYER TIMER SHOWN IN OFF POSITION DOOR SWITCH CLOSED, MOTOR AT REST, AN THERMOSTAT CLOSED, AND FABRIC SELECTOR SWITCH AT HIGH HEAT.

WASHER TIMER SHOWN IN ON POSITION TEMPERATURE SELECTOR SWITCH AT HOT WASH/COLD RINSE, AND PRESSURE SWITCH FULL.

CYCLES

CIRCUIT	AUTO DRY			TIMED DRY (MIN)						OFF		
	31.7	15	0	105.3	90	75	60	45	30		15	0
TIMER	[Bar chart showing timer contact closure]											
HEATER	[Bar chart showing heater contact closure]											
MOTOR	[Bar chart showing motor contact closure]											

BAR CHART ABOVE REPRESENTS ONE COMPLETE REVOLUTION OF TIMER SHAFT. SHADED PORTION OF BAR CHART INDICATES THE PROPORTIONAL TIMES THAT INTERNAL TIMER CONTACTS ARE CLOSED.

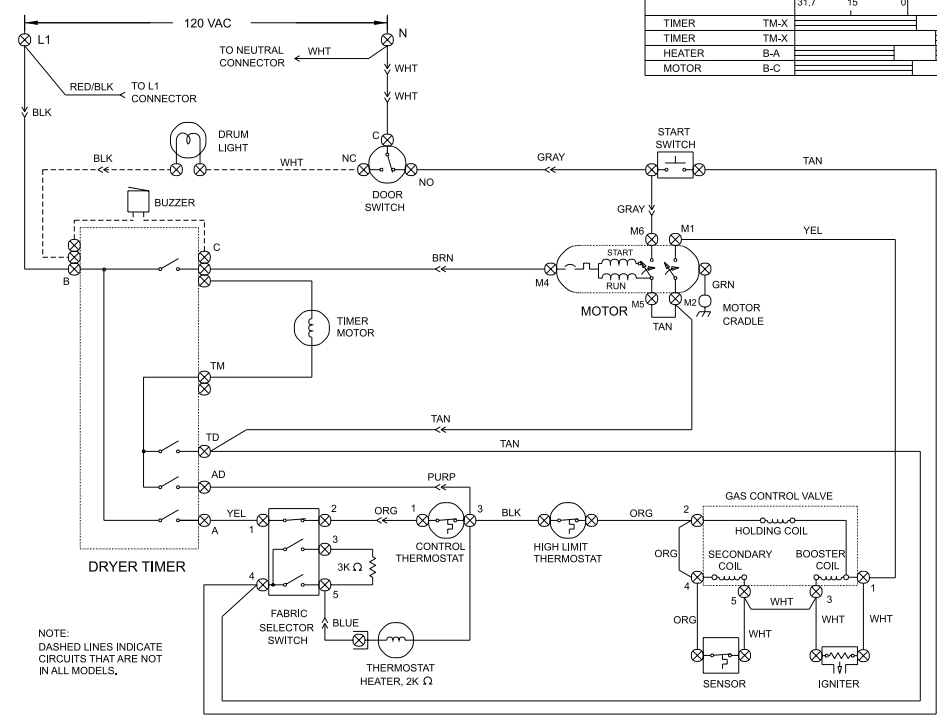

NOTE: DASHED LINES INDICATE CIRCUITS THAT ARE NOT IN ALL MODELS.

G

WIRING DIAGRAM
134125800